

DS+750

Government
Higher education
Houses of worship
Rental/Staging
Large venue
Entertainment



Lens sold separately

A bold, bright DLP® projector

Innovation meets flexibility with the Christie DS+750 offering more options than other 1-chip projectors on the market.

The Christie DS+750 features a unique, user-changeable, twin-color wheel system that gives you the flexibility to tailor your presentations to maximize high brightness images and superior color reproduction. At 7500 ANSI lumens, the Christie DS+750 also delivers SXGA+ resolution (1400 x 1050) – ideal for a variety of mid-to large-sized applications. Christie knows that flexibility is a key priority in large venue applications, so we offer a suite of optional motorized

high performance lenses for the Christie DS+750 to ensure superior image detail with unmatched quality.

If it's features that you are looking for, break away from traditional projection settings with vertical 360 degree on-axis rotation capability which allows this model to be used in highly creative environments. Additionally, the Christie DS+750 features Philips' VIDI™ lamp technology to significantly boost color performance.

Built-in color matching and edge-blending functions, Picture-in-Picture or Picture-by-Picture


modes and low acoustic noise offer presentation confidence and installation flexibility. With a broad range of standard inputs, this 1-chip DLP® solution is flexible and customizable.

Long life dual lamps, an auto-switching lamp feature and a sealed optical engine provide a low cost of ownership. And with the best price performance on the market, extensive warranties and service second to none, the Christie DS+750 is the option for your best image.

CHRISTIE®

DS+750 (103-023106-01)		
Image	brightness	• 7500 ANSI lumens high brightness color wheel
	contrast	• Up to 7500:1 with rich black reproduction
Display technology	type	• 1-chip 0.95" DLP® light engine
	native resolution	• 1400 x 1050 SXGA+
Lamp	type	• Dual 330W VIDITM UHP
	estimated life	• Normal mode: up to 2000 ¹ hrs • Eco mode: up to 2500 ¹ hrs
Input	signals	• WUXGA/UXGA/WSXGA+/SXGA+/SXGA/WXGA/XGA/SVGA/ VGA/MAC • Video (480i, 480P, 575i, 575p, 720P, 1080i, 1080p/psf)
	pixel clock	• Analog 230 MHz • Digital 160 MHz max
	scan rates	• Horizontal: 15-120kHz • Vertical: 48-120Hz
Inputs/ outputs, control and networking	inputs	• Input 1: DVI-D x 1 (compatible with HDCP), HDMI x 1 (v1.3b), D-Sub15 x 1 • Input 2: BNC x 5 (R, G, B, H, V & Y, Pb/Cb, Pr/Cr & Composite), S-video (Mini DIN 4-pin) • Input 3: Option card slot • Input 4: Option card slot (includes CCM-LX-1 network card)
	outputs	• D-Sub15 monitor out x 1
	control	• Serial input: Dsub-9 x 1 • Serial output: Dsub-9 x 1 • R/C jack: mini jack x 1 (wired remote) • USB port B type (service use only)
Optical system	• 1-chip DLP® (sealed engine)	
Lenses	fixed	• 0.87:1 (103-117100-XX)
	zoom	• Short 1.30-1.63:1 (103-118101-XX) • Standard 1.95-3.08:1 (103-120104-XX) • Long 3.03-5.50:1 (103-121105-XX) • Ultra long 5.21-8.63:1 (103-122106-XX)
Keystone	• Digital keystone vertical: ±30 degrees • Digital keystone horizontal: ±30 degrees	
Accessories	standard	• Rich color reproduction color wheel x 2 • Remote control • Power cords NA & EU • Real color manager Pro CD
	optional	• DVI-D/Dsub15 module • 5 BNC/Video module • DVI module (HDCP) • 5 BNC module • Dsub15 module • SDI-Dual module (HD-SDI only)
Enhanced feature sets	• User changeable color wheels • Illuminated input panel • Top loading lamps • Extended use AutoFilter for 24/7 applications • Edge blending and color matching capability • Mechanical shutter (light dower) • Auto-switching lamps • Networking and monitoring • Picture-by-Picture • Picture-in-Picture	
Power requirements	operating voltage	• 100-240VAC 50/60Hz
	operating current	• 9.2A (AC100V) • 4.4A (AC200V)
	power consumption	• 971W (Normal 100V) • 923W (Normal 200V) • 28W (Standby 100V) • 28W (Standby 200V)
	dissipation	• 3140 BTU/hr
Dimensions	size	• Body without lens (LxWxH): 20.6 x 15.7 x 9.5" (523.5 x 400.0 x 242.5mm)
	shipping size	• (LxWxH): 25.6 x 20.8 x 17.3" (651.0 x 528.0 x 439.0mm)
	weight without lens	• 43.4lbs (19.7kg) • Shipping weight: 55.1lbs (25.0kg)
Noise	• Standard mode: 40dBa • Eco mode: 36dBa	
Operating environment	• Temperature: 41-104°F (5-40°C) • Storage temperature: 14-140°F (-10-60°C) • Altitude: 0-8858ft (0-2700m) • Humidity: 20-80%	
Regulatory approvals	• This product conforms to the following regulations related to product safety, environmental requirements and electromagnetic compatibility (EMC): • FCC Part 15, Subpart B Class A • CISPR22/EN55022 • CISPR24/EN55024 • UL 60950-1 first edition • CAN/CSA-C22.2 No 60950-1-03 first edition • IEC60950-1:2006 • 2002/95/EC RoHS • CCC • KC • CE • SABS	
Limited warranty	• Projector: 3 years parts and labor (including light engine) • Lamp: 500 hours or 120 days (whichever comes first) • Contact an authorized Christie representative for full details of our limited warranty	

¹24/7 or extended use applications require AutoFilter and 24/7 maintenance agreement to maintain warranty.

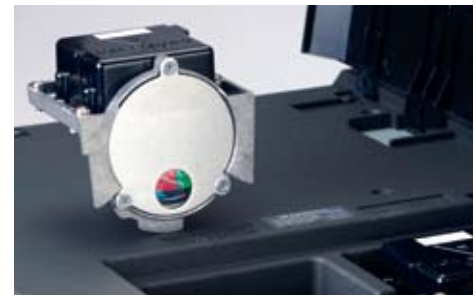


▲ A unique, user-changeable, twin-color wheel system gives you the flexibility to tailor your presentations to maximize high brightness images or superior color reproduction.




▲ The broad range of standard inputs enables you to customize and configure according to your application needs.

Bottom view

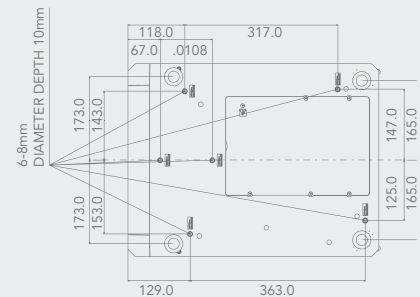

Front view

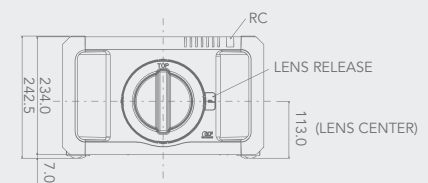

Corporate offices

Christie Digital Systems USA, Inc
USA – Cypress
ph: 714 236 8610

Christie Digital Systems Canada Inc.
Canada – Kitchener
ph: 519 744 8005

Worldwide offices

United Kingdom
ph: +44 (0) 118 977 8000

Germany
ph: +49 2161 664540

France
ph: +33 (0) 1 41 21 44 04

Eastern Europe and
Russian Federation
ph: +36 (0) 1 47 48 100

United Arab Emirates
ph: +971 (0) 4 299 7575

India
ph: (080) 41468941 – 48

Singapore
ph: +65 6877 8737

China (Shanghai)
ph: +86 21 6278 7708

China (Beijing)
ph: +86 10 6561 0240

Japan (Tokyo)
ph: 81 3 3599 7481

Korea (Seoul)
ph: +82 2 702 1601

Independent sales consultant offices

Spain
ph: +34 91 633 9990

Italy
ph: +39 (0) 2 9902 1161

South Africa
ph: +27 (0) 317 671 347



For the most current specification information, please visit www.christiedigital.com



Copyright 2010 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Christie Digital Systems Canada Inc.'s management system is registered to ISO 9001 and ISO 14001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice. Printed in Canada on recycled paper. 2810 Dec 10

CHRISTIE®